

ErisTerminal™ DECT 6.0 SIP Cordless Base Station and Cordless Handset

VSP600

Add hands-free mobility to your SIP communications with the VSP600 cordless base station. Expand up to six VSP601 SIP cordless handsets per base station, each with its own extension or unique phone number. The base station can be configured for up to six lines and supports up to four active, concurrent calls.



VSP600 DECT SIP Cordless Base Station and Cordless Handset Features¹


90 x 65 pixels (w x h) backlit display	2-way navigational pad
200-name phonebook	Redial
Support for up to 6 SIP lines/accounts and 4 concurrent calls	Orbitlink Wireless Technology™
Register up to 6 SIP cordless handsets	Paging, call transfer
3-party local conferencing	Do Not Disturb (DND)
7 days standby/7 hours talk time	Half-duplex speakerphone
10 selectable ring tones	Failover support and server redundancy
Adjustable volume	QoS: 802.1x, DiffServ (DSCP, TOS), STUN, VLAN 802.1pq
Backlit keypad	SIP compatibility: Asterisk-based platforms, Broadsoft®
LED status indicator and handset locator	2 soft keys
Call forwarding, call blocking	Supports auto IP provisioning, IPv4, DHCP Client, DNS, HTTPS, SNTP Client
Flash, hold, mute, intercom	Supports HD Voice and G.711, G.726, G729AB, G.722 wideband codecs
Message waiting indicator	2-year warranty
Call log/list, history, caller ID ² support	

Specifications, weights & dimensions

Color: GM (Gun Metal)	Giftbox dimensions (WxDxH): 4.80" x 4.72" x 6.22"
SKU: 03086	Giftbox weight: 1.59 lbs.
Product dimensions (WxDxH): BS: 4.55" x 1.67" x 5.94" Cordless HS:	Master pack dimensions (WxDxH): 10.20" x 10.04" x 7.01"
1.93"x1.22"x6.85" Charger: 2.99"x2.80"x2.76" Cordless HS on Charger:	Master pack weight: 7.12 lbs.
2.99"x2.80"x7.32"	Quantity: 4
Product weight: 1.35 lbs.	

VSP600 U.S. codes

APN: 80-9354-00

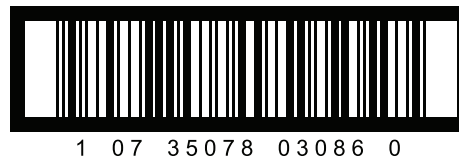

¹ Features and functionality may vary, depending on SIP service provider and/or SIP phone system platform.

² Use of caller ID features require a subscription available through your local telephone company.

