


Go to [www.vtechphones.com](http://www.vtechphones.com) to register your product for enhanced warranty support and latest VTech product news.




# vtech® Quick start guide

## What's in the box

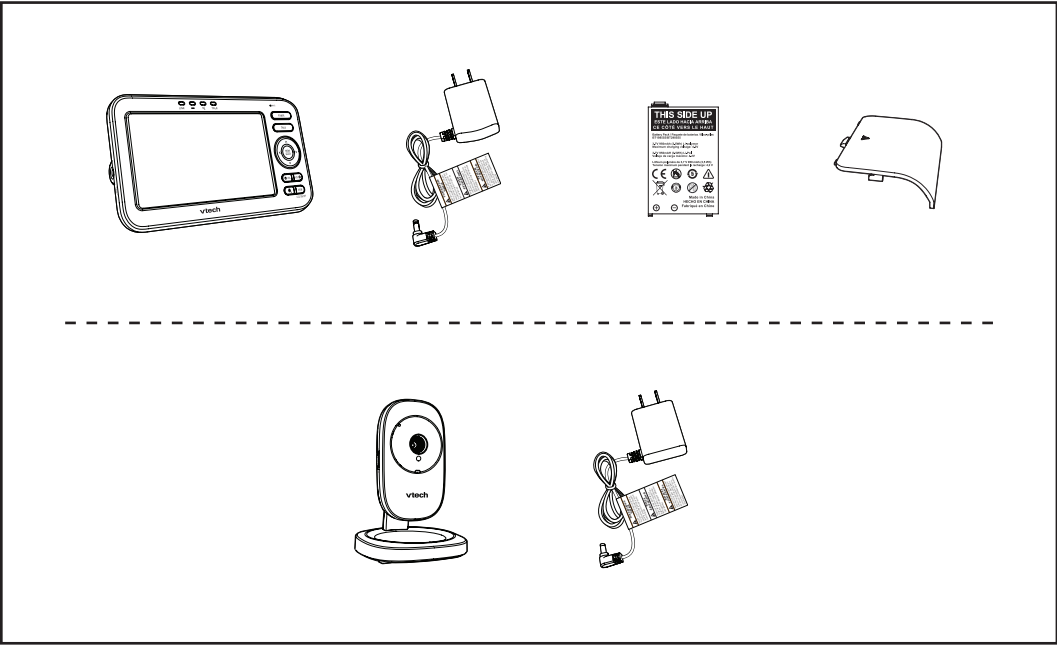

## VM5251 baby monitor system

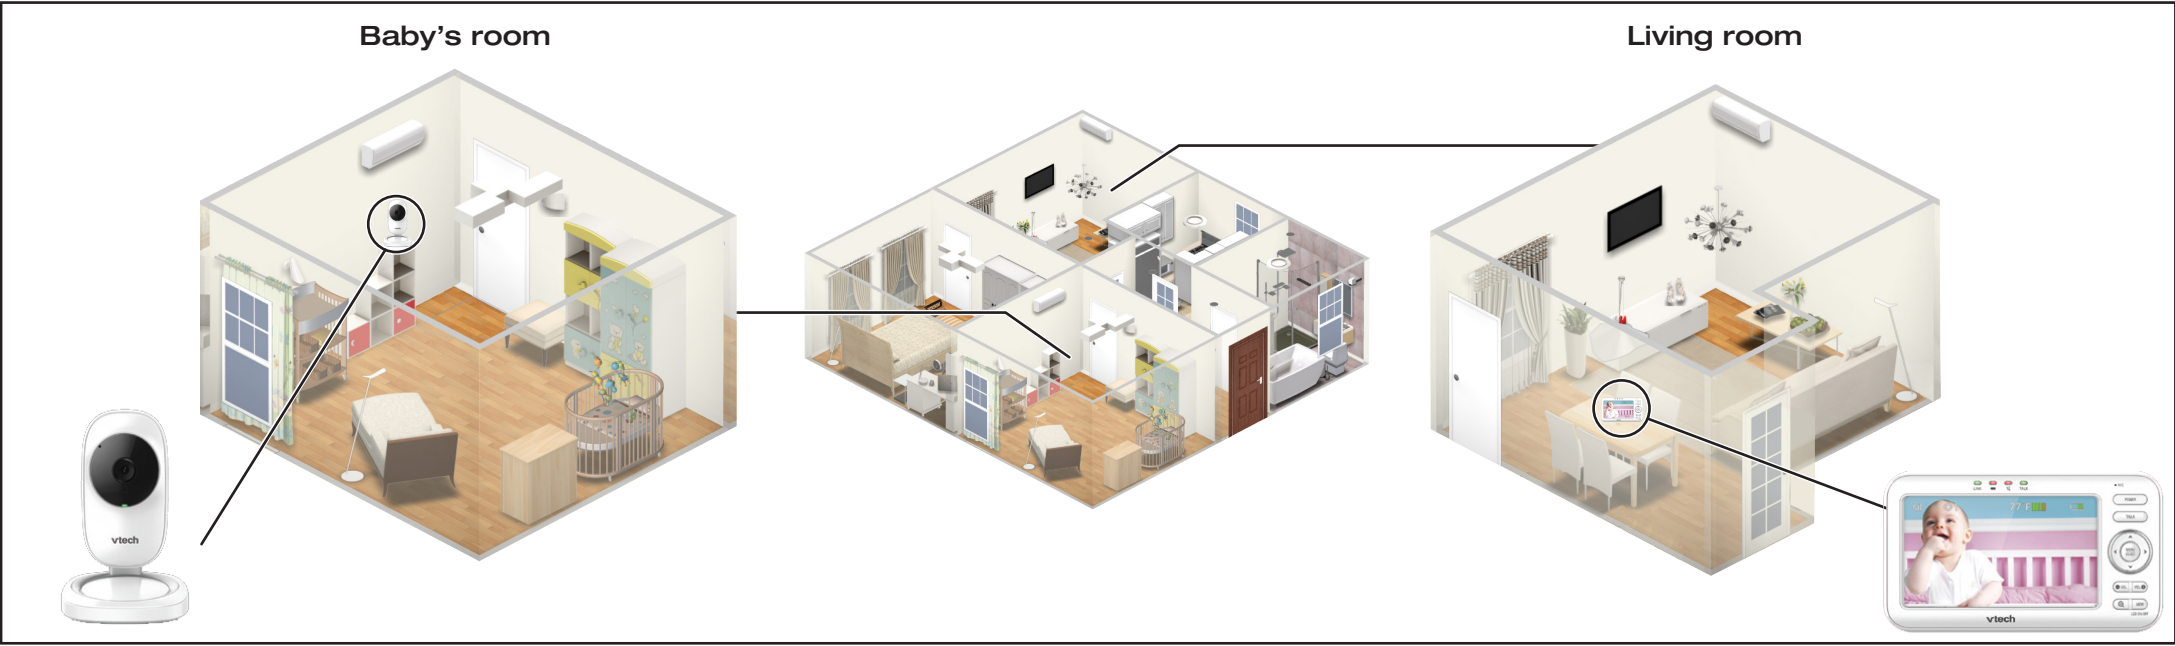

### 1 Connect and power on/off - Baby unit

1

2

1

2

NOTE

- Slide the ON/OFF switch to OFF to power off your baby unit.

### 2 Positioning - Baby unit

1

2

1

2

3

### 3 Install the battery

1

2

3

### 4 Connect and power on - Parent unit

1

2

3

CAUTION

- The default volume of your parent unit is level 4, and the maximum volume is level 7. If you experience high-pitched screeching noise from your baby monitor while positioning:
  - Make sure your baby unit and parent unit are more than 3 feet (1 meter) apart, OR
  - Turn down the volume of your parent unit.

### 5 Status check

Once you power on both your baby unit and parent unit, your parent unit displays image from the baby unit, and the **LINK** LED light turns on. The **ON/OFF** LED light of the baby unit also turns on.

LINK

### Dim mode

With dim mode preset to on, your parent unit display will dim to conserve energy after 10 minutes of inactivity, in which there is neither key pressed nor alert received from the baby unit.

1

2

NOTE

- If you do not want LCD to dim automatically, turn off the Dim Mode.

### Sound activation

When the baby unit detects no sound, the parent unit screen stays off to save power. Once a sound is detected, the parent unit screen turns on automatically. It will then turn off again after 50 seconds of no sound detection.

Sound-activated Screen

On

Off

1

2

### Night vision


NOTES

- It is normal if you see a short white glare on your parent unit screen as the baby unit is adapting to the dark environment.
- When the infrared LEDs are on, the images are in black and white. This is normal.


TIP

- Depending on the surroundings and other interfering factors, like lightings, objects, colors and backgrounds, the display resolution may vary. Adjust the baby unit's angle, or place the baby unit at a higher level to prevent glare and blurry display.

## Overview - Parent unit

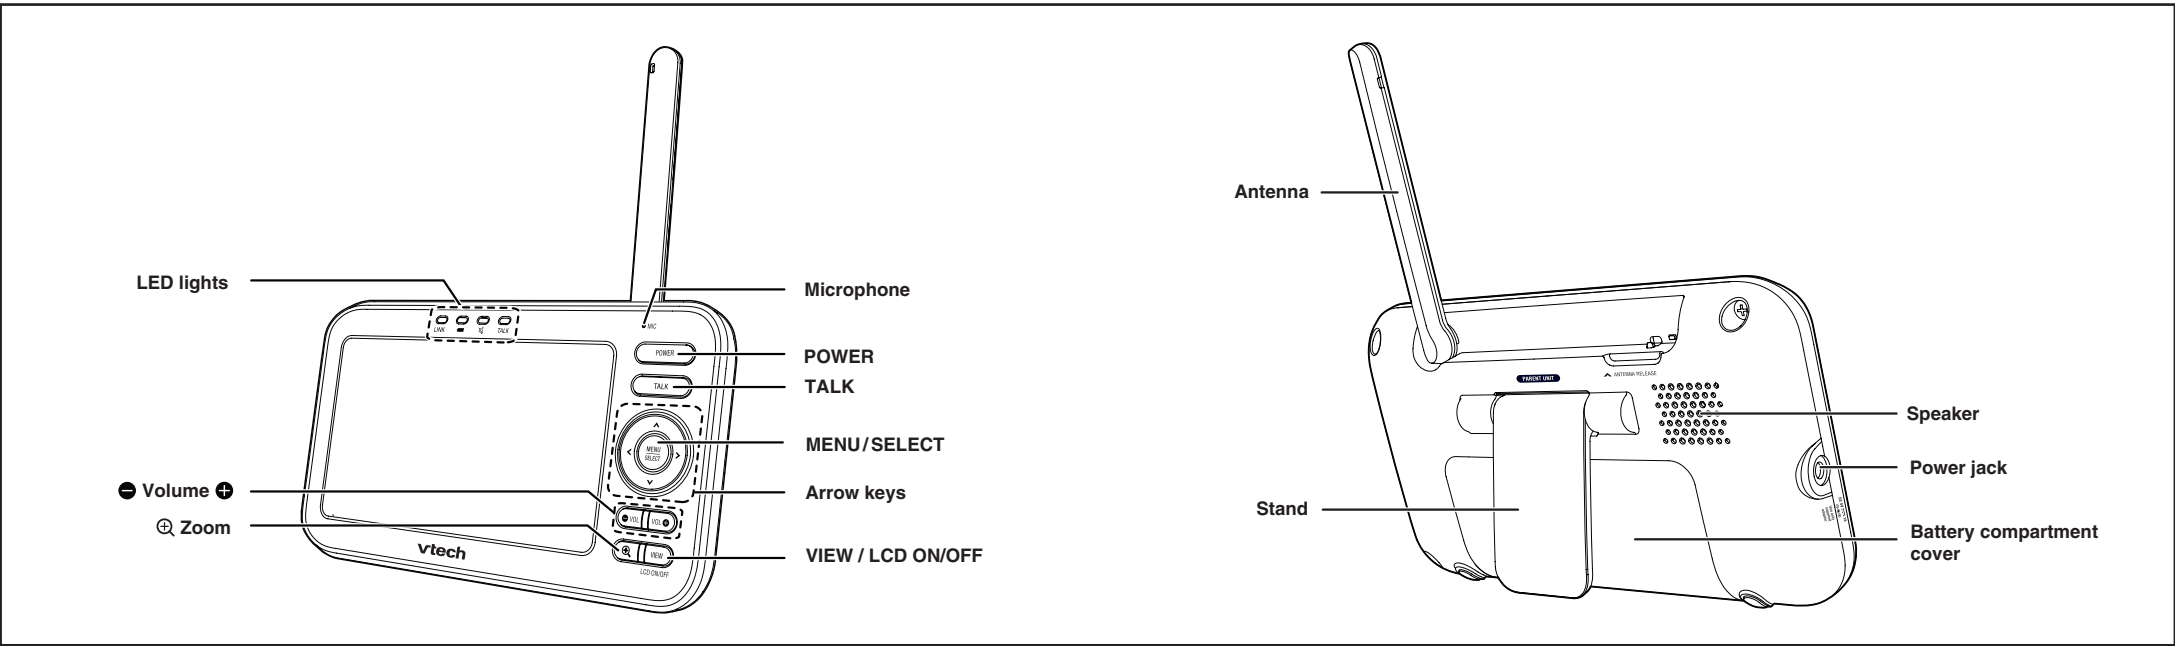


## Overview - Baby unit

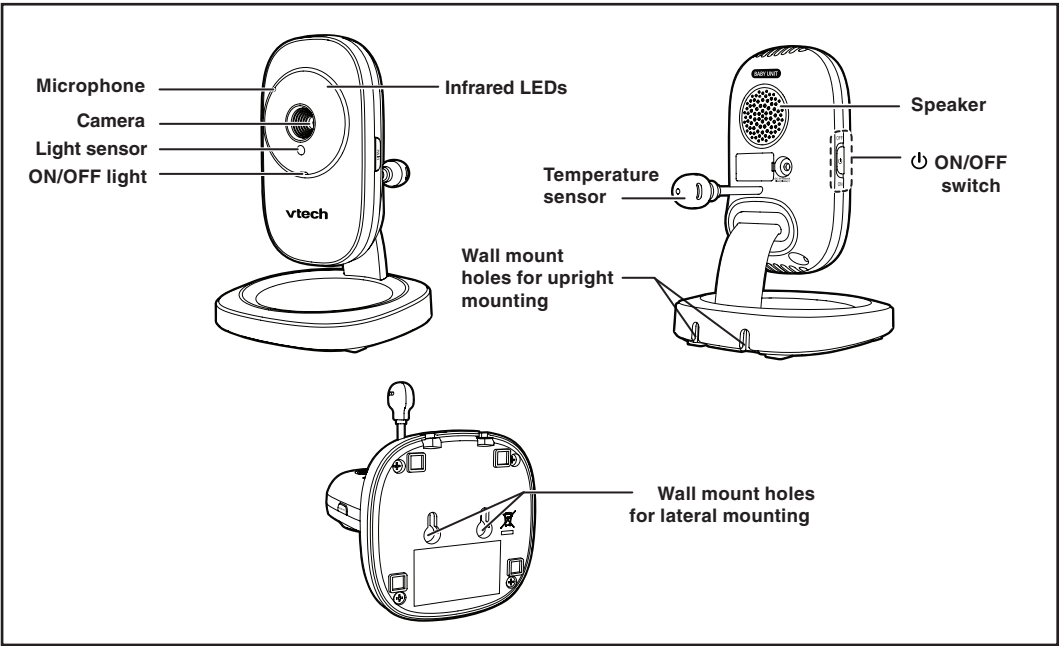

## Basic operation - Parent unit


### Adjust speaker volume

Press **VOL** or **VOL** to adjust your parent unit speaker volume. It determines the volume of sound transmitted from your baby unit.

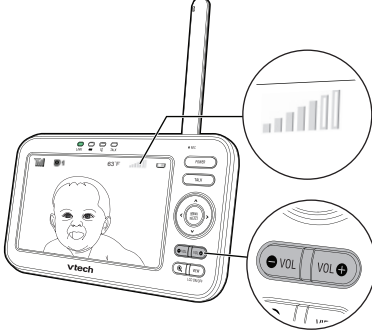


### Zoom

Press **Q** to zoom in or out.




### Talk to your baby unit

Press and hold **TALK** and speak to your parent unit. Your voice is transmitted to the baby unit.

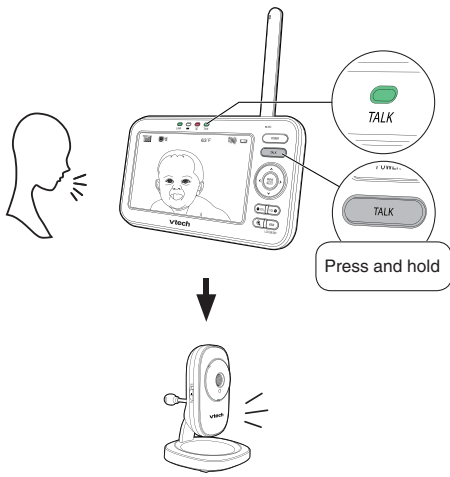

### Turn off the screen

Press and hold **LCD ON/OFF** to switch off the screen. You can still hear sound from the selected baby unit.



**TIP**


- Press any keys on the parent unit to turn on the screen again.

### Use the menu

Press **MENU/SELECT** to enter the menu, choose a menu item, or save a setting. You can use the parent unit menu for the advanced settings or operations, such as to play or stop the baby unit lullaby, or to adjust the baby unit sound sensitivity.


While in the menu:

- Press **▲** or **▼** to scroll up or down.
- Press **▶** to select an item.
- Press **◀** to return to the main menu or idle screen.



### Turn off the parent unit

Press and hold **POWER** to power off your parent unit.

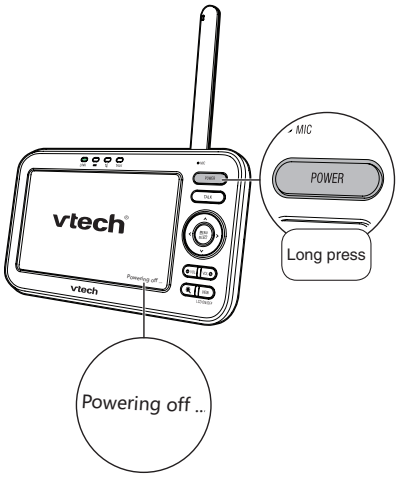


## Mount the baby unit (optional)

You will need to purchase the following items separately to mount your baby unit:


- 2 screws
- 2 anchors

**1**



Use a pencil to mark two holes in parallel. Make sure they are the same distance apart as the wall mount holes on the baby unit.

**2**




Drill two holes in the wall.

If you drill the holes into a stud, go to step 3.

**-OR-**


If you drill the holes into an object other than a stud, insert the wall anchors into the holes. Tap gently on the ends with a hammer until the wall anchors are flush with the wall.

**3**




Insert the screws into the holes and tighten the screws until only 1/4 inch of the screws are exposed.

**4**

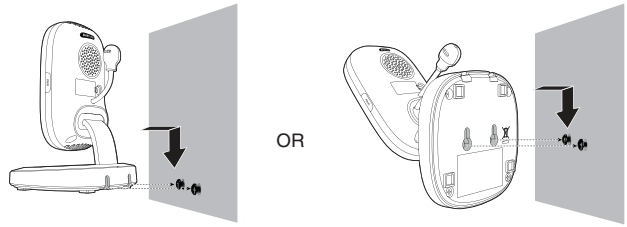

Depending on your preference, choose the upright or lateral orientation to mount your unit. Align the wall mount holes at the bottom or at the rear side of the baby unit with the screws on the wall. Slide the baby unit down until it locks into place.

**5**

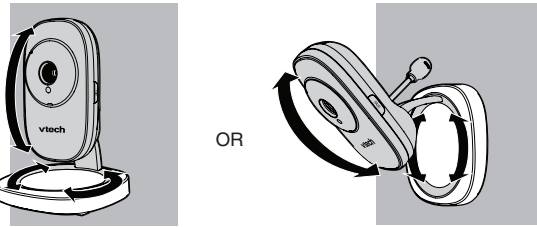

Tilt or rotate to adjust camera angle.

