Go to www.vtechphones.com to register your product for enhanced warranty support and the latest VTech product news.

VM345 VM345-15 VM345-19 VM345-2

Safe & Sound Full Color Video Monitor









# User's manual

Press to increase the parent unit

Press to decrease the parent unit

· While in a menu, press to choose ar

• While in a menu, press to scroll up.

press and hold to move the zoomed

While in SPLIT-VIEW mode, press to

move the selection box upward.

While viewing zoomed image,

Press to turn on or off the

SPLIT-VIEW mode.

speaker volume.

speaker volume.

Press to enter the menu.

item, or save a setting.

MENU/SELECT

image upward.

SPLIT

+/VOL

-/VOL

13

## Congratulations

on purchasing your new VTech product Before using this product, please read Important safety instructions.


This manual has all the feature operations and troubleshooting necessary to install and operate your new VTech product. Please review this manual thoroughly to ensure proper installation and operation of this innovative and feature rich VTech product.

For support, shopping, and everything new at VTech, visit our website at www.vtechphones.com.

## What's in the box







1 set for VM345/VM345-15/VM345-19

Parent unit overview	<ul> <li>7 ►</li> <li>While in a menu, press to choose an item.</li> <li>While viewing zoomed image, press and hold to move the zoomed image rightward.</li> <li>While in SPLIT-VIEW mode, press to</li> </ul>	<ul> <li>14 ▼</li> <li>While in a menu, press to scroll down.</li> <li>While viewing zoomed image, press and hold to move the zoomed image downward.</li> <li>While in SPLIT-VIEW mode, press to move the context of the base downward.</li> </ul>	<ul> <li>Current view status</li> <li>Displays the number of the baby unit that is being viewed when in SINGLE-CAM and PATROL mode.</li> <li>Displays the number of the highlighted baby unit when in SPLIT-VIEW mode.</li> </ul>	<ul> <li>Battery status</li> <li>         Implies animates when the battery is charging.     </li> <li>         Implies animates when the battery is fully charged.     </li> <li>         Implies animates animates when the battery is fully charged.     </li> <li>         Implies animates animates when the battery is fully charged.     </li> <li>         Implies animates animates when the battery is low and needs charging.     </li> </ul>	Sound-activated Screen Automatically turns on the parent unit screen when a baby unit detects a sound after the screen is turned off. When no sound is detected, the screen is automatically off to save power.	Using the baby monitor Power on or off the baby unit • Slide the ON/OFF switch on the baby units to ON to power on. The ON/OFF LED light turns on.	<ul> <li>Play lullaby on the baby unit</li> <li>You can play lullaby on the baby unit to comfort your baby.</li> <li>Press ▶/■ on the baby unit to play lullaby. It starts playing lullaby for 10 minutes.</li> <li>Press ▶ on the baby unit to switch to the starts played by the baby unit to switch the starts played by the baby unit to switch the starts played by the baby unit to switch to switch the starts played by the baby unit to switch the starts played by the baby unit to switch the starts played by the baby unit to switch the starts played by the baby unit to switch the starts played by the baby unit to switch the starts played by the baby unit to switch the starts played by the baby unit to switch the starts played by the baby unit to switch the starts played by the baby unit to switch the starts played by the baby unit to switch the starts played by the baby unit to switch the</li></ul>	<ul> <li>NOTE</li> <li>While the screen is dimmed, any keypress or alert message will trigger the screen to return to the preset brightness level. After 10 minutes of idle, it will be dimmed again.</li> <li>Adjust the sound sensitivity of</li> </ul>	Turn on or off the sound activation When sound activation is on, as long as no sound is detected within 50 seconds, the parent unit screen will turn off automatically to save power. When your baby unit detects a sound, the
	move the selection box rightward.       8         8 <b>4 BACK</b> • While in a menu, press to return to	move the selection box downward.15Stand16Speaker	<ul> <li>Patrol mode</li> <li>Displays when the parent unit is in PATROL mode.</li> </ul>	<ul> <li>AC power without battery</li> <li>Displays when the parent unit is connected to AC power without the battery.</li> </ul>	You can change the brightness of the parent unit screen, or turn on the <b>Dim Mode</b> to save power.	<ul> <li>Slide the ON/OFF switch on the baby units to OFF to power off. The ON/OFF LED light turns off.</li> </ul>	other Iullabies. <ul> <li>Press ►/■ again to stop the Iullaby.</li> <li>TIP</li> <li>When the Iullaby stops, press ►/■ again to replay.</li> </ul>	the baby units You can choose to hear sounds from the baby units all the time, or to hear sounds that exceed a certain level. You can use the parent unit to adjust the microphone sensitivity	sound activation triggers the parent unit screen to turn on automatically. When no sound is detected within 50 seconds, the screen will be off again.
2 8 8	<ul> <li>the main menu or idle screen.</li> <li>While viewing zoomed image, press and hold to move the zoomed image leftward.</li> </ul>	17 Power jack Parent unit lights	<ul> <li>Split-view mode         <ul> <li>Displays when the parent unit is in SPLIT-VIEW mode.</li> <li>Night vision</li> </ul> </li> </ul>	Parent unit main menu icons	Rename           You can choose a specific name for the baby unit from a pre-defined name list.	<ul> <li>Power on or off the parent unit</li> <li>Press and hold <sup>(1)</sup> to power on the parent unit. The screen turns on.</li> </ul>	<b>Set the language</b> You can select a language (English, French or	of your baby units from <b>Lowest</b> to <b>Highest</b> . The higher the sensitivity level, the more sensitive the baby unit is in detecting sounds for transmitting to the parent unit. The sound	<ol> <li>Press MENU when the parent unit is idle</li> <li>Press ▼ or ▲ to choose Sound-activate Screen, then press SELECT.</li> <li>Press ▼ or ▲ to choose On or Off, then</li> </ol>
	While in SPLIT-VIEW mode, press to move the selection box leftward.     VIEW / LCD ON/OFF     Press and hold to turn off the parent	LINK On when the parent unit is linked to the baby unit. Flashes when the link to any baby unit being viewed is lost.	Displays when the baby unit being viewed has activated the night vision feature.	You can select a language (English, French or Spanish) to be used in all screen displays.	Pair/Unpair           The baby unit and parent unit provided are already paired. You can add or replace baby units	<ul> <li><u>Press and hold</u> d again to power off the parent unit. The screen turns off.</li> <li>Turn on or off the parent unit</li> </ul>	<ul> <li>Spanish) to be used in all screen displays.</li> <li>1. Press MENU when the parent unit is idle.</li> <li>2. Press ▼ or ▲ to choose Language, then press SELECT.</li> </ul>	sensitivity level is preset to <b>Highest</b> . Sound sensitivity table for reference Sensitivity Level Description	press SELECT to confirm your selection The screen returns to main menu. MOTES • Sound activation is available in SINGLE-CAN
	<ul> <li>Press and noid to tail on the parent unit screen.</li> <li>Press to view the image of the next baby unit in SINGLE-CAM or PATROL mode.</li> </ul>	<ul> <li>On when the parent unit is connected to AC power, or the battery is charging.</li> <li>Flashes when the parent unit</li> </ul>	Coom     Displays when the baby unit camera has zoomed in.     Temperature alert tone	Alert Tone You can set the parent unit to beep when • the parent unit operates in low battery condition;	(VM315/VM315-15/VM315-19, purchased separately) to your baby monitor system.	Screen You can turn on or off the parent unit screen without powering off the parent unit. You can still hear sound from the baby units.	<ol> <li>Press ♥ or ▲ to choose English, Français or Español, then press SELECT to confirm your selection.</li> </ol>	Highest         The parent unit speaker is constantly on, and you will hear all sounds (including background noises) from your baby's room.	<ul> <li>and <b>PATROL</b> mode only.</li> <li>If the sound sensitivity is set to <b>Highest</b>, the parent unit screen may remain on continuous even though sound activation is on.</li> </ul>
	<ul> <li>PATROL</li> <li>Press to turn on or off the PATROL mode.</li> </ul>	Off when the parent unit is disconnected from AC power.	<ul> <li>Displays when the temperature alert tone is set on.</li> <li><sup>°</sup>F or <sup>°</sup>C</li> <li><sup>°</sup>E Displays the real-time temperature</li> </ul>	<ul> <li>the link between the parent unit and the baby unit is lost; or</li> <li>the baby unit detects sounds while in SPLIT-VIEW mode.</li> </ul>	Parent unit display messages The selected baby unit is out of range or is turned	<ul> <li><u>Press and hold</u> LCD ON/OFF on the top of the parent unit to turn off the screen.</li> <li>Press any key on the parent unit to turn on the screen again.</li> </ul>	Adjust LCD brightness You can change the brightness of the parent unit screen from Level 1 to Level 5. The LCD	High The parent unit speaker turns on for soft babbling and louder sounds from your baby. It remains quiet when your baby sleeps soundly.	

LINK	On when the parent unit is linked to the baby unit. Flashes when the link to any baby unit being viewed is lost.
-	On when the parent unit is connected to AC power, or the battery is charging. Flashes when the parent unit battery is low and needs charging. Off when the parent unit is
	disconnected from AC power.
TALK	On when the parent unit is talking to the baby unit.
Ø	On when the parent unit speaker volume is turned off.

#### Parent unit display icons

#### **Connection status** displays when strong signal

- strength is detected between the baby unit and the parent unit. or displays when moderate
- or low signal strength is detected between the baby unit and the parent unit
- T displays when the link between the baby unit and the parent unit is lost.

#### Lullaby


Displays when the baby unit being viewed is playing lullaby.

## Install the battery

The parent unit runs on rechargeable battery or AC power. To continuously monitor vour baby, make sure you use both battery and AC power at the same time. With the battery alone, the parent unit can cordlessly run for a short time only.

- **P**NOTES
- Use only the battery supplied with this product • The operating time for using the rechargeable battery is short. If you want to monitor your baby for a long time, we recommend you connect the parent unit to AC power.
- If the parent unit will not be used for a long time, disconnect and remove the battery to prevent

#### Install the battery as shown below.



· Press down on the large tab of the battery





#### Make sure the label THIS SIDE UP is facing up while inserting the battery




## Replace the battery

To replace the battery, press down on the large tab of the battery compartment cover and pull it out, then follow the steps above to install the battery.

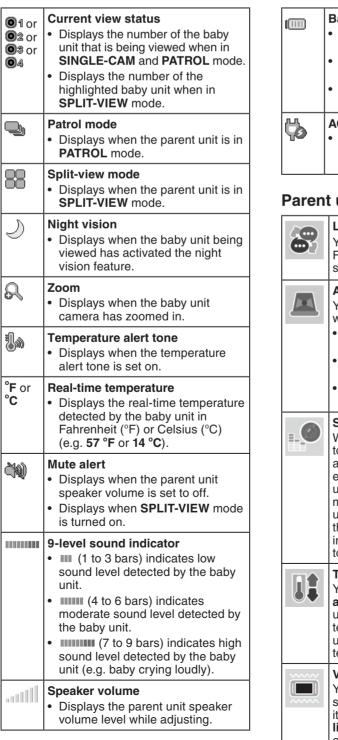

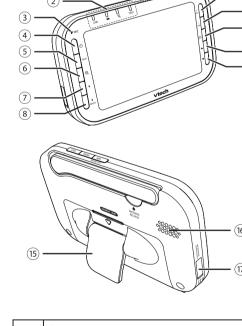

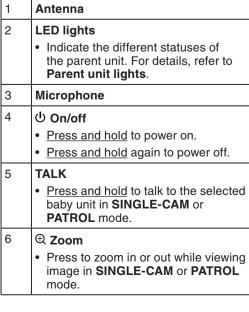






2 sets for VM345-2

# Vitech






## attery

- **O**NOTES
- product.
- or cabinet outle

possible leakage.

compartment cover to pull it out





## Connect and charge the

#### Use only the power adapters supplied with this

- Make sure the electrical outlets are not controlled by wall switches.
- The power adapters are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if they are plugged into a ceiling, under-the-table
- Make sure the parent unit, the baby unit and the power adapter cords are out of reach of children

## Connect the baby monitor





- **Battery status** r>I□→I□→I□→I□□ animates when the battery is charging. Im displays solid when the battery is fully charged. C displays when the battery is
- low and needs charging.
- AC power without battery Displays when the parent unit is connected to AC power without the battery.

#### Parent unit main menu icons

- Language
- You can select a language (English French or Spanish) to be used in all screen displays.

#### Alert Tone

- You can set the parent unit to beep
- the parent unit operates in low battery condition
- the link between the parent unit and the baby unit is lost; or the baby unit detects sounds while in **SPLIT-VIEW** mode.

#### Sensitivity

- With this feature, you can choose to hear sounds from the baby unit all the time, or to hear sounds that exceed a certain level. You can use the parent unit to adjust the microphone sensitivity of your baby unit. The higher the sensitivity level the more sensitive the baby unit is
- in detecting sounds for transmitting to the parent unit.

#### Temperature

You can turn on the **Temperature** alert tone so that the parent unit beeps whenever the room temperature detected by the baby unit falls outside of the desired temperature range.

#### Vibration

You can turn on the vibration alert so that the parent unit vibrates when it receives Low battery tone, No link alert, Sound alert in split-view or Temperature alert tone after turning on the respective alert tones.

#### Charge the parent unit battery

When you have connected the parent unit and installed its battery for the first time or after power outage, the parent unit powers on automatically. The battery icon indicates the battery status (see the following table).

#### **P**NOTES

- The parent unit battery is fully charged after 3 hours of continuous charging It takes longer to charge the battery when the parent unit is turned on. To shorten the charging
- time, turn the parent unit off while charging. The standby time varies depending on the
- sensitivity level you set, your actual use and the age of the battery.

	Battery indicators	Battery status	Action	
	The battery icon is off and b displays.	No battery is installed but operates using AC power, or the battery has been installed incorrectly.	Install the parent unit battery. Charge without interruption (at least 30 minutes).	
	The screen displays Battery low at Parent Unit and I The Iight flashes.	The battery has very little charge and may be used for only a short time.	Charge without interruption (about 30 minutes).	
	The battery icon becomes solid (IIII).	The battery is fully charged.	To keep the battery charged, connect it to AC power when not in use.	

CAM #

Parent Unit

Sound Sound

Battery empty.

Powering off ...

Temperature

too high at CAM #

Temperature

too low at CAM #

Powering on...

off.

detected at CAM # SPLIT-VIEW mode.

range.

\* # represents the selected baby unit number.

Battery low at parent unit is very low and

out of range or is turned

The battery level of the

needs to be recharged.

The battery is empty and

The sound level exceeds

the threshold at CAM # ir

detected by the baby unit

is higher/lower than the

desired temperature alert

The parent unit is turning

searching for baby units.

The parent unit is

The temperature

needs to be recharged.

## efore use


#### 

· This baby monitor is intended as an aid. It is not a substitute for proper adult supervision, and should not be used as such

#### Test your baby monitor

You may test the baby monitor before initial use, and at regular times thereafter.

- ()CAUTION
- For hearing protection, make sure the parent unit is more than 1 meter (3 feet) away from the baby unit. If you hear any high-pitched noise, move the parent unit further until the noise stops. You can also press -/VOL on the parent unit to lower or mute the noise

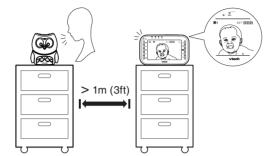

- 1. Make sure your baby units and parent unit are on.
- 2. The parent unit displays images from the baby unit.
- Speak towards the baby unit microphone. You will hear the sound at the parent
- 3. If you have more than one baby unit, press **VIEW** on the top of your parent unit. The screen switches to other baby units. Then, repeat step 2.

#### 

 When the parent unit displays \$\$\$ and then No link to CAM # (# represents the selected baby unit number), and the LINK LED light flashes, move the parent unit closer to the baby unit (observe the minimum distance of 1 meter/ 3 feet). You can also check if the baby monitor is connected to a live power socket and switched on.

#### 

 Increase the parent unit speaker volume if you cannot hear the sounds transmitted from the baby

#### Jsing the baby monitor

#### Power on or off the baby unit

- Slide the **ON/OFF** switch on the baby units to ON to power on. The ON/OFF LED light turns on
- Slide the **ON/OFF** switch on the baby units to OFF to power off. The ON/OFF LED light turns off.

#### Power on or off the parent unit

- Press and hold <sup>ψ</sup> to power on the parent unit. The screen turns on
- parent unit. The screen turns off.

#### Turn on or off the parent unit screen

- Press and hold LCD ON/OFF on the top of the parent unit to turn off the screen.
- Press any key on the parent unit to turn on the screen agair

## Adjust the speaker volume

- For parent unit:
- Press +/VOL/- on the parent unit at any time when viewing images.

#### 

• When the parent unit speaker volume is set to zero, appears on the screen and the 🖾 light

#### For baby unit:


The baby unit speaker volume determines the lullaby volume and talkback volume transmitted from parent unit.

 Press ▼/VOL/▲ on the baby unit to adjust the speaker volume.


## Positioning the baby monitor


## ()CAUTION


- Keep the baby units out of the reach of your baby. Never place or mount the baby units inside the baby's crib or playpen
- To avoid interference from other electronic devices, place your baby monitor far away from devices such as wireless routers, microwaves, cell phones and computers.
- 1. Place the baby units more than 1 meter (3 feet) away from your baby.



2. Adjust the angle of the baby unit camera to aim at your baby.





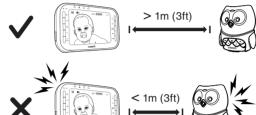

- ()CAUTION The default volume of your parent unit is level 4.
- If you experience high-pitched screeching noise from your baby monitor while positioning:
- Make sure your baby units and parent unit are more than 1 meter (3 feet) apart, OR
- Turn down the volume of your parent unit.

## Play lullaby on the baby unit

- Press ▶/■ on the baby unit to play lullaby. It starts playing lullaby for 10 minutes.
- Press ➤ on the baby unit to switch to the other lullabies.
- Press ▶/■ again to stop the lullaby.

## 

### Set the language

- You can select a language (English, French or Spanish) to be used in all screen displays.
- 1. Press **MENU** when the parent unit is idle. 2. Press  $\mathbf{\nabla}$  or  $\mathbf{A}$  to choose **Language**, then
- press SELECT. 3. Press **▼** or **▲** to choose **English**, **Français** or Español, then press SELECT to confirm your selection.

#### Adjust LCD brightness

You can change the brightness of the parent unit screen from Level 1 to Level 5. The LCD brightness is preset to Level 3.

- 1. Press **MENU** when the parent unit is idle.
- 2. Press  $\mathbf{\nabla}$  or  $\mathbf{A}$  to choose **LCD**, then press

Turn on or off the dim mode

- SELECT. 3. Press **SELECT** again to choose **Brightness**.
- 4. Press ▼ or ▲ to choose the desired level of brightness, then press **SELECT** to confirm vour selection.

The dim mode is preset to on to help you save

the parent unit power. Whenever the parent

screen is still on, the screen will be dimmed

1. Press **MENU** when the parent unit is idle.

2. Press  $\mathbf{\nabla}$  or  $\mathbf{A}$  to choose **LCD**, then press

3. Press  $\mathbf{\nabla}$  or  $\mathbf{A}$  to choose **Dim Mode**, then

4. Press  $\nabla$  or  $\blacktriangle$  to choose **On** or **Off**, then

press **SELECT** to confirm your selection.

automatically to save power.

SELECT.

press SELECT.


unit has been left idle for 10 minutes while the


The operating range of the baby monitor is up to 300 meters (1,000 feet) outdoors or 50 meters (160 feet) indoors. The actual operating range may vary depending on the environmental conditions and other interferences such as walls, doors and other

Operating range

obstructions.

Overview





Medium

Low

Lowest

press SELECT.

confirm your selection.



¢	ØNOTE				
•	While the screen is dimmed, any keypress or				
	alert message will trigger the screen to return to				
	the preset brightness level. After 10 minutes of				

## Adjust the sound sensitivity of

#### Sound sensitivity table for reference

The parent unit speaker turns on for loud babbling and louder sounds from your baby. It remains quiet whe vour baby makes soft sounds.

The parent unit speaker turns on for crying and louder sounds from your paby. It remains quiet when your baby makes soft sounds.

The parent unit speaker turns on for oud crying or screeching sounds rom your baby. It remains quiet when your baby makes soft sounds.

1. Press **MENU** when the parent unit is idle.

2. Press  $\mathbf{\nabla}$  or  $\mathbf{A}$  to choose **Sensitivity**, then If you have more than one baby unit,

the system prompts you to choose the desired baby unit or all baby units, press ▼ or ▲ to choose ALL CAM or CAM #, then press SELECT.

3. Press  $\triangledown$  or  $\blacktriangle$  to choose the desired sensitivity level, then press **SELECT** to

•	You can adjust the baby unit placement to
	improve the sound detection.

1	Light sensor		
2	Infrared LEDs		
3	Camera		
4	<ul> <li>/■ Play/Stop</li> <li>Press to play or stop lullaby on the baby unit.</li> </ul>		
5	<ul> <li>VOL/▲</li> <li>Press to adjust the baby unit speaker volume. It determines the lullaby volume and talkback volume transmitted from the parent unit.</li> </ul>		
6	Microphone		
7	<ul> <li>Skip</li> <li>Press to play the next lullaby.</li> </ul>		
8	<ul> <li>ON/OFF light</li> <li>On when the baby unit is turned on and is paired to the parent unit.</li> <li>Flashes when the baby unit is not being viewed; or when the link to the parent unit is lost.</li> </ul>		
9	<ul><li>ON/OFF switch</li><li>Slide to turn on or off the baby unit.</li></ul>		
10	Speaker		
11	Temperature sensor		
12	<ul> <li>PAIR</li> <li>Your baby units and parent unit provided are already paired.</li> <li>Press and hold on accessory baby units (VM315/VM315-15/VM315-19, purchased separately) to pair to the parent unit.</li> </ul>		
13	<ul><li>Threaded socket</li><li>For wall mount installation use.</li></ul>		
	Power jack		

#### Turn on or off the sound activation

- Press MENU when the parent unit is idle. 2. Press ▼ or ▲ to choose **Sound-activated**
- Screen, then press SELECT 3. Press  $\mathbf{\nabla}$  or  $\mathbf{A}$  to choose **On** or **Off**, then press SELECT to confirm your selection. The screen returns to main menu.

- Sound activation is available in SINGLE-CAM and **PATROL** mode only.
- If the sound sensitivity is set to **Highest**, the parent unit screen may remain on continuously even though sound activation is on.


#### Monitoring mode

Every time the parent unit is turned on, it displays a baby unit in SINGLE-CAM mode If there are more than one baby units in your system, you can also monitor your baby in PATROL or SPLIT-VIEW mode.


SINGLE-CAM	The screen displays a single baby unit in full screen.		
PATROL 🖳	A single cam view that transits to a different baby unit every 10 seconds.		
SPLIT-VIEW 器	The screen displays all baby units (up to four) on one screen.		

In SINGLE-CAM or PATROL mode:

Press VIEW to view the next baby unit.

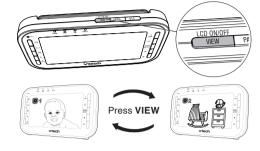

Press PATROL to switch to PATROL mode if you are in **SINGLE-CAM** mode, and vice

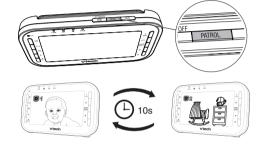

- 17. This product should not be placed in any area where proper ventilation is not provided. Slots and openings in the back or bottom of this product are provided for ventilation. To protect them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be placed near or over a radiator or heat register
- 18. Never push objects of any kind into this product through the slots because they may touch dangerous voltage points or create a short circuit. Never spill liquid of any kind on the product.
- 19. To reduce the risk of electric shock, do not disassemble this product, but take it to an authorized service facility. Opening or removing parts of the product other than specified access doors may expose you to dangerous voltages or other risks. Incorrect reassemblir can cause electric shock when the product is subsequently used
- 20. You should test the sound reception every time you turn on the units or move one of the components
- 21. Periodically examine all components for damage 22. Be aware of possible loss of privacy while using public airwaves. Conversations may be picked up by other nursery monitors, cordless phones scanners, etc.
- 23. Children should be supervised to ensure that they do not play with the product
- 24. The product is not intended for use by persons (including children) with reduced physical. sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

#### SAVE THESE INSTRUCTIONS

#### Cautions

- . Use and store the product at a temperature between 32°F and 104°F. Do not expose the product to extreme cold, heat or direct sunlight. Do not put the product close to
- a heating source Batteries should not be exposed to excessive
- heat such as bright sunshine or fire. Make sure the baby unit(s) and the adapter
- cord(s) are always out of reach of the baby, at least 3 feet away from the baby or crib, to avoid a oossible strangulation hazard. Never place the baby unit(s) inside the baby's crib
- or playpen. Never cover the baby unit(s) or parent unit with anything such as a towel or a blanket. Other electronic products may cause interference with your baby monitor. Try installing your baby monitor as far away from these electronic devices as possible wireless routers, radios, cellular telephones, intercoms, room monitors, televisions, personal computers, kitchen appliances and cordless telephones.

• Press SPLIT to enter the SPLIT-VIEW mode.



#### In SPLIT-VIEW mode:

- Press ▲, ▼, ◀ or ► to select a baby unit. Press ⊕ or VIEW key to view the selected baby unit temporarily in SINGLE-CAM mode. It returns to SPLIT-VIEW mode after
- 10 seconds Press PATROL to enter PATROL mode. • Press **SPLIT** to return to the mode
- (SINGLE-CAM or PATROL) used before entering SPLIT-VIEW mode.

#### RNOTE

 The parent unit is muted while in SPLIT-VIEW mode.

#### Zoom

You can zoom in or out while viewing image from baby unit in SINGLE-CAM and PATROL mode

- Press 🕀 to zoom in.
- Press and hold  $\blacktriangle$ ,  $\triangledown$ ,  $\triangleleft$  or  $\triangleright$  to move the zoomed image upward, downward, leftward or rightward correspondingly.
- Press ⊕ again to zoom out.

#### Talk

You can use the **TALK** function of the parent unit to comfort your baby in SINGLE-CAM and PATROL mode

- 1. Press and hold TALK on the parent unit. The **TALK** light turns on
- 2. Speak towards the microphone on the parent unit. Your voice is broadcast to the baby unit.
- 3. Release the TALK key to stop the broadcast. The TALK light goes off.

Precautions for users of implanted cardiac pacemakers

Cardiac pacemakers (applies only to digital cordless devices)

Wireless Technology Research, LLC (WTR), an independent research entity, led a multidisciplinary evaluation of the interference between portable vireless devices and implanted cardiac pacemakers. Supported by the U.S. Food and Drug Administration, WTR recommends to physicians that:

- Pacemaker patients
- Should keep wireless devices at least six inches from the pacemake Should NOT place wireless devices directly over
- the pacemaker, such as in a breast pocket, when it is turned ON

WTR's evaluation did not identify any risk to bystanders with pacemakers from other persons usina wireless devices.

#### Electromagnetic fields (EMF)

This VTech product complies with all standards regarding electromagnetic fields (EMF). If handled properly and according to the instructions in this user's manual, the product is safe to be used based on scientific evidence available today

#### he RBRC<sup>®</sup> seal

The RBRC<sup>®</sup> seal on the lithium-ion battery indicate that VTech Communications, Inc. is voluntarily participating in an industry program to collect and recycle these batteries at the end of their useful lives, when taken out of service within the United States and Canada

The RBRC<sup>®</sup> program provides a convenient alternative to placing used lithium-ion batteries into the trash or municipal waste, which may be illegal in your area.

VTech's participation in BBBC<sup>®</sup> makes it easy for you to drop off the spent battery at local retailers participating in the RBRC<sup>®</sup> program or at authorized VTech product service centers. Please call

1 (800) 8 BATTERY® for information on Li-ion battery recycling and disposal bans/restrictions in your area. VTech's involvement in this program is part of its commitment to protecting our environment

and conserving natural resources. RBRC<sup>®</sup> and 1 (800) 8 BATTERY are registered trademarks of the **Rechargeable Battery Recycling** Corporation.

## Set alert tone

#### Low battery tone

You can set the parent unit to beep when the parent unit operates in low battery condition.

- 1. Press MENU when the parent unit is idle. 2. Press  $\mathbf{\nabla}$  or  $\mathbf{A}$  to choose **Alert Tone**, then
- press SELECT. 3. Press SELECT again to choose
- Low Battery Tone.
- 4. Press  $\triangledown$  or  $\blacktriangle$  to choose **On** or **Off**, then press SELECT to confirm your selection.

#### No link alert

You can set the parent unit to beep when the link between the parent unit and the baby unit is lost

- 1. Press **MENU** when the parent unit is idle.
- Press ▼ or ▲ to choose Alert Tone, then press SELECT
- 3. Press ▼ or ▲ to choose No Link Alert, then press SELECT.
- 4. Press  $\triangledown$  or  $\blacktriangle$  to choose **On** or **Off**, then press SELECT to confirm your selection.

#### Sound alert in SPLIT-VIEW

**P**NOTE

· Only available in SPLIT-VIEW mode You can turn on this feature so that the parent unit beeps and displays **Sound detected at** 

- CAM # when the baby unit detects sounds.
- 1. Press **MENU** when the parent unit is idle.
- 2. Press  $\mathbf{\nabla}$  or  $\mathbf{A}$  to choose **Alert Tone**, then press **SELECT** to select.
- 3. Press  $\mathbf{\nabla}$  or  $\mathbf{A}$  to choose **Sound alert in** split-view, then press SELECT.
- 4. Press  $\mathbf{\nabla}$  or  $\mathbf{\Delta}$  to choose **On** or **Off**, then press SELECT to confirm your selection.

## FCC and IC regulations

#### FCC Part 15

This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications mission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio requency energy and, if not installed and used in accordance with the instructions, may cause harmful nterference to radio communications. However there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a
- circuit different from that to which the receiver is connected.
- · Consult the dealer or an experienced radio/TV technician for help.

WARNING: Changes or modifications to this equipment not expressly approved by the party ula vola the user s authority to operate the equipment

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: this device may not cause harmful interference. and (2) this device must accept any interference received, including interference that may cause undesired operation.

To ensure safety of users, the FCC has established criteria for the amount of radio frequency energy that can be safely absorbed by a user or bystande according to the intended usage of the product. This product has been tested and found to comply with he FCC criteria. The baby unit shall be installed and used such that parts of all persons' body are maintained at a distance of approximately 8 in (20 cm) or more. The transmitter and antenna of the parent unit shall be held at least 1 in (2.5 cm) from vour face.

This Class B digital apparatus complies with Canadian requirement CAN ICES-3 (B)/NMB-3(B)

#### Monitor the temperature

Your baby unit monitors the temperature of vour baby's room with its built-in temperature sensor. If the detected temperature is outside of the preset temperature range, the parent unit will display alert message.

#### Set temperature range

You can set the desired room temperature alert range. The minimum temperature can be set between 52 °F (11 °C) and 69 °F (20 °C). The maximum temperature can be set between 70 °F (21 °C) and 86 °F (30 °C).

- 1. Press **MENU** when the parent unit is idle. 2. Press ▼ or ▲ to choose **Temperature**, then press SELECT.
- 3. Press  $\mathbf{\nabla}$  or  $\mathbf{A}$  to choose **Minimum** or Maximum, then press SELECT.
- If you have more than one baby unit, the system prompts you to choose the desired baby unit or all baby units, press ▼ or ▲ to choose ALL CAM or CAM #. then press SELECT.
- 4. Press  $\triangledown$  or  $\blacktriangle$  to choose the desired minimum or maximum temperature, ther press SELECT to confirm your selection.

#### Temperature alert tone

You can turn on the temperature alert tone so that the parent unit will emit an alert tone if the detected temperature is out of range

- 1. Press **MENU** when the parent unit is idle.
- 2. Press  $\mathbf{\nabla}$  or  $\mathbf{A}$  to choose **Temperature**, then press SELECT.
- 3. Press  $\mathbf{\nabla}$  or  $\mathbf{A}$  to choose **Alert Tone**, then press SELECT. If you have more than one baby unit,

the system prompts you to choose the

desired baby unit or all baby units, press

 $\checkmark$  or  $\blacktriangle$  to choose ALL CAM or CAM #,

4. Press  $\nabla$  or  $\blacktriangle$  to choose **On** or **Off**, then

press SELECT to confirm your selection.

This device complies with Industry Canada licence-

Operation is subject to the following two conditions

(1) this device may not cause harmful interference,

and (2) this device must accept any interference.

including interference that may cause undesired

The term "IC:" before the certification/registration

This product meets the applicable Industry Canada

The baby unit complies with FCC RF radiation

environment. The baby unit should be installed and

between the baby unit and all persons' body. Use of

other accessories may not ensure compliance with

FCC RF exposure guidelines. This transmitter must

not be co-located or operating in conjunction with

any other antenna or transmitter. This equipment

complies also with Industry Canada RSS-102 with

California Energy Commissic

This baby monitor meets the California Energy

consumption. Your baby monitor is set up to comply

vith the energy-conserving standards right out of

Follow the instructions to install and charge the

battery. The CEC battery charging testing mode is

Even if the parent unit is paired to baby units, the

CEC battery charging testing mode is activated while

Commission (CEC) regulations for energy

ittery charging testing mode

respect to Canada's Health Code 6 for Exposure of

operated with a minimum distance of 8 in (20 cm)

exposure limits set forth for an uncontrolled

number only signifies that the Industry Canada

technical specifications were met

RF radiation exposure statement

technical specifications.

Humans to RF Fields.

activated while charging.

it is powered off and charging.

the box.

then press SELECT.

Industry Canada

exempt RSS standard(s)

#### Temperature format

You can choose to display the temperature in Fahrenheit (°F) or Celsius (°C)

1. Press **MENU** when the parent unit is idle. 2. Press ▼ or ▲ to choose Temperature, then

press SELECT. 3. Press  $\mathbf{\nabla}$  or  $\mathbf{A}$  to choose **Format**, then press SELECT.

4. Press ▼ or ▲ to choose Fahrenheit or Celsius, then press SELECT to confirm your selection.

#### Turn on or off the vibration

You can turn on the vibration feature so that the parent unit vibrates when it receives any of Low battery tone, No link alert, Sound alert in split-view or Temperature alert tone after turning on the respective alert tones.

1. Press **MENU** when the parent unit is idle. 2. Press  $\mathbf{\nabla}$  or  $\mathbf{A}$  to choose **Vibration**, then press SELECT.

3. Press  $\triangledown$  or  $\blacktriangle$  to choose **On** or **Off**. 4. Press SELECT to confirm your selection.

#### Rename the baby units

You can rename each baby unit. Once the baby unit is renamed, its new name together with the baby unit number will appear in the sub-menu of below options:

 Sensitivity Rename

SELECT

Temperature
 Pair/Unpair

1. Press **MENU** when the parent unit is idle. 2. Press  $\triangledown$  or  $\blacktriangle$  to choose **Rename**, then press

3. Press  $\nabla$  or  $\blacktriangle$  to choose the desired baby unit, then press SELECT.

4. Press ▼ or ▲ to choose the desired name for the baby unit, then press **SELECT** to confirm your selection

## For cETL compliance only

#### Mesures de sécurité importantes

Lorsque vous utilisez votre appareil, vous devriez toujours suivre certaines mesures de précaution de base afin de réduire les risques d'incendie. d'électrocution et de blessures corporelles, dont ceux qui suivent

1. Observez toutes les instructions et mises en garde inscrites sur l'appareil

L'installation par un adulte est requise.

3. Ce produit a été concu pour être un dispositif d'appoint seulement. Il n'est pas le remplacement d'une supervision responsable et adéquate par un adulte et ne devrait pas être utilisé comme telle. 4. Ce produit n'est pas conçu pour être utilisé en tant que moniteur médical

N'utilisez pas cet appareil près de l'eau ni de toute autre source d'humidité, par exemple, près d'une baignoire, cuve à lessive, évier de cuisine, dans un sous-sol humide ni près d'une piscine. dans un soussol humide ou une douche. MISE EN GARDE: Il peut y avoir un risque

d'explosion si vous utilisez le mauvais type de piles pour l'unité du parent. N'utilisez que le ploc-piles rechargeable inclus ou le bloc-piles de echange (BT198555/BT298555). N'incinérez pas les piles. Celles-ci risqueraient d'exploser. Jetez les piles usées selon les renseignements suivant le sceau du RBRC<sup>™</sup>

N'utilisez que les adaptateurs inclus avec ce produit 1 'utilisation d'un adaptateur dont la polarité ou la tension serait inadéguate risque d'endommager sérieusement le produit et mettre votre sécurité en péril

- Adaptateur de l'unité du bébé
- Sortie : 5 V CC 1A Adaptateur de l'unité du parent :
- Sortie : 5 V CC 1A

8. Lorsqu'ils sont branchés dans une prise de courant. les adaptateurs secteur ont été concus pour être orientés correctement, soit à la verticale ou au plancher. Les broches n'ont pas été conçues pour supporter le poids du bloc d'alimentation et le maintenir en place si celuic est branché dans une prise au plafond, sous une table ou dans un meuble.

Pour les PRODUITS À BRANCHER À UNE PRISE DE COURANT, la prise de courant doit être installée près du produit, afin d'assurer une accessibilité sécuritaire à la prise de courant.

10. Débranchez ce produit de la prise de courant avant de procéder au nettoyage. N'utilisez pas de nettovants en aérosols. Utilisez un chiffon humide pour le nettover.

11. Débranchez les cordons d'alimentation avant de remplacer le bloc-piles

12. Ne coupez pas les cordons d'alimentation pour remplacer les fiches, car ceci peut présenter un danger potentiel

#### Night vision

The baby unit has infrared LEDs that allow you to see your baby clearly at night or in a dark room. When the baby unit being viewed detects low light levels, the infrared LEDs are switched on automatically. The images from this baby unit is in black and white, and  $\mathcal{J}$  appears on screen.

#### **P**NOTES

 It is normal if you see a short white glare on your parent unit screen as the baby unit is adapting to the dark environment.

 When the infrared LEDs are on, the image is in black and white. This is normal due to external light sources.

 Depending on the surroundings and other interfering factors, like lightings, objects, colors and backgrounds, the display resolution may vary Adjust the baby unit's angle or place the baby unit at a higher level to prevent glare and blurry display.

#### Pair new baby unit (VM315/VM315-15/VM315-19)

The baby units and parent unit provided are already paired. You can add or replace any baby units (VM315/VM315-15/VM315-19, purchased separately) to your video and audio monitor system. You can pair a maximum of four baby units to your parent unit.

For more details, refer to the user's manual that comes with your VM315/VM315-15/ VM315-19 new baby unit.

#### ieneral product care

- To keep this product working well and looking good, follow these guidelines:
- · Avoid putting it near heating appliances and devices that generate electrical noise (for example, motors or fluorescent lamps).
- DO NOT expose it to direct sunlight or moisture. · Avoid dropping the product or treating it roughly.
- Clean with a soft cloth DO NOT immerse the parent unit and the baby
- unit in water and do not clean them under the tap. • DO NOT use cleaning spray or liquid cleaners.
- Make sure the baby unit and parent unit are dry before you connect them to the power again.

#### Storage

When you are not going to use the baby monitor for some time, remove the rechargeable battery from the parent unit. Store the parent unit, the baby unit and the adapters in a cool and dry place

- - 13. Ne laissez aucun objet reposer ni appuver sur le cordon d'alimentation. N'installez pas cet appareil dans un endroit où l'on risque d'écrase le cordon d'alimentation ou de le piétiner.
  - 14. Ne faites fonctionner cet appareil gu'avec le type d'alimentation indiqué sur l'étiquette. S vous ne connaissez pas le type d'alimentation que vous possédez à votre domicile, consultez votre marchand ou votre compagnie locale d'électricité.
  - Ne surchargez pas les prises de courant murales ni les rallonges électriques.
  - 16. Ne placez pas cet appareil sur un chariot, meuble, trépied, support de montage ni table chancelants.
  - 17. Les trous et ouvertures du boîtier, situés à l'arrière de l'appareil ou sous celui-ci, servent à aérer l'appareil. Pour l'empêcher de surchauffer ne bloquez sous aucun prétexte ces ouvertures et n'empêchez pas l'aération adéquate de l'appareil en le plaçant sur un lit, divan, tapis ou toute autre surface similaire. De même, ne le positionnez pas à proximité ni au-dessus d'une source de chaleur ou d'un calorifère. De plus, ne placez pas l'appareil dans un endroit avan de vous assurer qu'il y ait une bonne circulation
  - 18. N'enfoncez jamais d'objets à travers les ouvertures de cet appareil, car ils pourraient entrer en contact avec des points de tension dangereux ou causer des courts-circuits qui peuvent dégénérer en incendies ou en risques d'électrocution. Ne renversez jamais de liquide dans ce produit.
  - Afin de réduire les risques d'électrocu démontez pas cet appareil, mais apportez-le dans un centre de service autorisé. L'ouverture du boîtier ou le retrait de toutes pièces que contient cet appareil, à l'exception de l'accès autorisé à certaines portes ou ouvertures, risque de vous exposer à des points de tension dangereux ou d'autres dangers. Un remontage incorrect peut par la suite présenter des risques d'électrocutior
  - 20. Vous devriez tester la réception chaque fois que vous mettez l'appareil en fonction. 21. Examinez les composantes afin de vérifier si
  - celles-ci ne sont pas endommagées 22. Soyez avisé de la perte de la confidentialité lorsque vous utilisez les ondes publiques. Les conversations peuvent être entendues par d'autres moniteurs de bébé, des téléphones sans fil, des scanneurs, etc.
  - 23. Les enfants devraient être supervisés afin de vous assurer qu'ils ne jouent pas avec l'appareil
  - 24. Le produit n'est pas conçu pour être utilisé par des personnes (incluant des enfants) aux capacités physiques, sensorielles ou mentales réduites ou qui manquent d'expérience et de connaissances, à moins qu'on leur ait donné suffisamment de supervision ou d'instructions relativement à l'utilisation de l'appareil par une personne responsable de leur sécurité.

#### **CONSERVEZ CES INSTRUCTIONS**

#### Frequently asked question

Below are the questions most frequently asked about the baby monitor. If you cannot find the answer to your question, visit our website at www.vtechphones.com, or contact 1 (800) 595-9511 for customer service. In Canada, visit our website at www.vtechcanada.com or call **1 (800) 267-7377**.

Why does the baby monitor not respond normally?	<ul> <li>Try the following (in the order listed) for common cure:</li> <li>1. Disconnect the power to the baby units and the parent unit.</li> <li>2. Remove the batteries in the parent unit. Then install the batteries again.</li> <li>3. Wait a few seconds before connecting power back to the baby units and the parent unit.</li> <li>4. Turn on the baby units and the parent unit.</li> <li>5. Wait for the parent unit to synchronize with the baby units. Allow up to one minute for this to take place.</li> </ul>			
Why don't the power-on light of the baby unit and parent unit go on when I switch on the units?	Perhaps the parent unit is not connected to the power. Insert the appliance plug into the parent unit and put the adapter in a wall socket. Then <u>press and hold</u> $O$ to switch on the parent unit and to establish connection with the baby unit.			
	Perhaps the baby unit is not connected to the power. Connect the baby unit to the power. Then set the <b>ON/OFF</b> switch to <b>ON</b> to switch on the baby unit and to establish connection with the parent unit.			
Why doesn't my parent unit	Make sure the power is not controlled by a wall switch.			
charge while connected to AC power?	Make sure the battery is correctly installed in your parent unit.			
	You may have used the battery for a long time. Replace a new battery.			
Why is my screen in black and white?	The screen is in black and white during nighttime or in a dark room. This is normal due to external light sources.			

	Why do I get glare or blurry display on my screen when	During nighttime or in a dark room, the surroundings and other interfering factors, like lightings, objects, colors and backgrounds may affect the image quality on your parent unit screen. Adjust the baby unit's angle or place the baby unit at a higher level to prevent glare and blurry display.		Why does the parent unit beep?	The baby up range. Move closer to the less than 3
	viewing my baby at night?				If the paren by the provi not have en parent unit Charge the
	Why does the baby monitor	The parent unit and baby units may be too close to each other.			unit for up to If your pare
	produce a high-pitched noise?	Move the parent unit away from the baby units until the noise stops; OR			SPLIT-VIEV baby units r
T lig b fl: tr		Turn down the volume of your parent unit.			The temper room may b
	The <b>ON/OFF</b> light on the baby unit flashes and the parent unit displays <b>T</b> .	<ul> <li>The baby unit is unpaired from the parent unit. Follow below steps to pair the baby unit. Make sure both parent unit and baby unit are on before pairing.</li> <li>Press MENU when the parent unit is idle.</li> <li>Press ▼ or ▲ to choose Pair/Unpair CAM, then press SELECT.</li> <li>Press ♥ or ▲ to choose an empty baby unit slot, then press SELECT. The parent unit screen displays Press and hold the pair button at the CAM for 5 seconds until the power indicator flashes</li> <li>Immediately press and hold PAIR on the bottom of the</li> </ul>		Why does the parent unit beep/vibrate frequently in <b>SPLIT-VIEW</b> mode?	You may ha sensitivity le the sound a feature are unit notifies including ba beeps (or v sound sens
				Why does the parent unit react too quickly to other sounds?	The baby u sounds that Adjust the s lower level unit speake
				Why don't I hear a sound/ Why can't I hear my baby cry?	The parent may be too +/VOL to in
					You may ha sensitivity le <b>sound sen</b> <b>unit</b> to set t
		baby unit with a narrow pointed object such as a pencil. The ON/OFF light flashes quickly. When pairing is successful, the		Why can't I establish a connection? Why is the connection lost every now and then? Why are there sound	The baby u range. Move closer to the (observe th of 1 meter/
		screen displays the view of newly paired baby unit in <b>SINGLE-CAM</b> mode. The ON/OFF light on the new baby unit remains on.			Other electricause interference

#### imited warrant

#### What does this limited warranty cover?

The manufacturer of this VTech Product warrants to the holder of a valid proof of purchase ("Consumer or "vou") that the Product and all accessories provided in the sales package ("Product") are free from defects in material and workmanship pursuant to the following terms and conditions, when installed and used normally and in accordance with the Product operating instructions. This limited warranty extends only to the Consumer for Products purchased and used in the United States of America and Canada.

If pairing fails, the scree

pairing process again.

paired at a time.

Only one baby unit can be

displays Pairing failed. Try th

## What will VTech do if the Product is not free from the limited warranty period ("Materially Defective

During the limited warranty period, VTech's Product, we may replace it with a new or refurbished etain defective parts, modules, or equipmen

The limited warranty period for the Product extends or replacement Product for a period of either (a) Product is shipped to you or (b) the time remaining on the original one-year warranty; whichever is

#### What is not covered by this limited warranty? This limited warranty does not cover:

- 1. Product that has been subjected to misuse, accident, shipping or other physical damage, improper installation, abnormal operation or handling, neglect, inundation, fire, water or other liquid intrusion; or
- 2. Product that has been damaged due to repair, alteration or modification by anyone other than an
- authorized service representative of VTech; or 3. Product to the extent that the problem experienced is caused by signal conditions, network reliability,
- or cable or antenna systems; or 4. Product to the extent that the problem is caused
- by use with non-VTech accessories; or
- 5. Product whose warranty/quality stickers, product

defects in materials and workmanship during Product")?

authorized service representative will repair or replace at VTech's option, without charge a Materially Defective Product. If we repai the Product, we may use new or refurbished replacement parts. If we choose to replace the Product of the same or similar design. We will Repair or replacement of the Product, at VTech's option, is your exclusive remedy. VTech will return the repaired or replacement Products to you in working condition. You should expect the repair or replacement to take approximately 30 days

How long is the limited warranty period? for ONE (1) YEAR from the date of purchase. If VTech repairs or replaces a Materially Defective Product under the terms of this limited warranty. this limited warranty also applies to the repaired 90 days from the date the repaired or replacement

or difficulty: and and the date of purchase or receipt; and

> 3. Provide your name, complete and correct mailing address, and telephone number.

are not covered by this limited warranty

systems outside the unit.

#### Other limitations

warranty service?

This warranty is the complete and exclusive agreement between you and VTech. It supersedes all other written or oral communications related to this Product. VTech provides no other warranties for this Product. The warranty exclusively describes all of VTech's responsibilities regarding the Product. There are no other express warranties. No one is authorized

should not rely on any such modification.

State/Provincial Law Rights: This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state or province to province.

2. N'exposez pas cet appareil à des froids ou des chaleurs extrêmes, ainsi qu'à la lumière directe du soleil. Ne l'installez pas près d'une source de chauffage.

Utilisez et entreposez le produit à une

Mises en garde

3. Le bloc-piles ne doit pas être exposé à la chaleur excessive telle que la lumière du soleil ou au feu.

température entre 0° C (32°F) et 40°C (104° F).

- 4. Assurez-vous que le moniteur et le cordon de l'adaptateur sont toujours hors de portée des enfants, à au moins 1 mètre (3 pieds) de l'enfant ou du berceau, pour éviter tout risque de strangulation
- Ne jamais placer le moniteur à l'intérieur du berceau ou du parc de bébé. Ne jamais couvrir le moniteur ou l'unité (s) portative avec un article el une serviette ou une couverture.
- D'autres équipements électroniques peuvent produire des interférences sur votre moniteur vidéo et audio. Tentez d'installer votre moniteur vidéo ou audio à l'écart des appareils électroniques tels que des routeurs sans fil, radios, téléphones cellulaires, interphones, moniteurs, téléphones, ordinateurs personnels, électroménagers et téléphones sans fil.

## Stimulateurs cardiaques implantés dans

dispositifs numériques sans fil) :

WTR recommande aux médecins:

en marche.

auiourd'hui

Les simulateurs cardiaques (ne s'applique qu'aux

L'organisme 'Wireless Technology Research, LLC

interférences entre les téléphones sans fil portatifs

aliments et drogues (FDA) des États-Unis, la firme

Avis aux détenteurs de stimulateurs cardiaques

au moins six pouces du simulateur cardiaque.

directement sur le stimulateur cardiague, tel que

dans une poche de chemise, lorsque celui-ci est

identifié de risque pour les détenteurs de simulateurs

Ils ne doivent PAS placer le téléphone sans fil

L'étude effectuée par l'organisme WRS n'a pas

cardiaques causés par les gens qui utilisent

dispositifs sans fil à proximité de ceux-ci.

Ce produit de VTech est conforme à toutes

électromagnétiques (EMF) standard. Si vous le

de nombreuses années, selon les meilleures

évidences scientifiques dont nous disposons

manipulez correctement en suivant les instructions

de ce quide, son utilisation sera sécuritaire pendant

Champs électromagnétiques (EMF)

les normes se rapportant aux champs

Vous devriez maintenir les dispositifs sans fil à

(WTR)', une firme de recherche indépendante,

et les stimulateurs cardiaques implantés dans

'organisme. Appuyée par l'Administration des

a mené une évaluation pluridisciplinaire des

units may be out of ve the parent unit ne baby units (but not

ent unit is powered ded battery, it m nough charge for the t to perform normally battery in the parent to 3 hours.

rent unit is in W mode, some of you may detect sounds.

erature of your baby's be too high or too low.

have set the sound level to Highest when alert (and vibration) turned on. The paren es you of all sounds ackground noise with vibrations). Adjust the nsitivity to a lower leve

unit also picks up other an those of your baby. sensitivity level to a or lower the parent ker volume.

unit speaker volume low or off. Press increase the volume

have set a low sound level. See Adjust the nsitivity of the baby t to a higher level.

units may be out of ve the parent unit he baby units ne minimum distance / 3 feet).

tronic products may erference with your baby monitor. Try installing your baby monitor as far away from these electronic devices as possible.

erruptions?

serial number plates or electronic serial numbers have been removed, altered or rendered illegible; or 6. Product purchased, used, serviced, or shipped for repair from outside the United States of America or Canada, or used for commercial or institutional purposes (including but not limited to Products

used for rental purposes); or 7. Product returned without a valid proof of purchase (see item 2 on the next page); or

8. Charges for installation or set up, adjustment of customer controls, and installation or repair of

#### How do you get warranty service?

To obtain warranty service in the USA, please visit our website at www.vtechphones.com or call 1 (800) 595-9511. In Canada, go to

www.vtechcanada.com or call 1 (800) 267-7377 **NOTE:** Before calling for service, please review the user's manual - a check of the Product's controls and features may save you a service call.

Except as provided by applicable law, you assume the risk of loss or damage during transit and transportation and are responsible for delivery o nandling charges incurred in the transport of the Product(s) to the service location. VTech will return repaired or replaced Product under this limited warranty. Transportation, delivery or handling charge are prepaid. VTech assumes no risk for damage or loss of the Product in transit. If the Product failure is not covered by this limited warranty, or proof of purchase does not meet the terms of this limited warranty, VTech will notify you and will request that you authorize the cost of repair prior to any furthe repair activity. You must pay for the cost of repair and return shipping costs for the repair of Products that

#### What must you return with the Product to get

1. Return the entire original package and contents including the Product to the VTech service location along with a description of the malfunction

2. Include a "valid proof of purchase" (sales receipt) identifying the Product purchased (Product model)

to make modifications to this limited warranty and you

## portant safety structions

When using your equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:

- 1. Follow all warnings and instructions marked on the product.
- . Adult setup is required.
- . This product is intended as an aid. It is not a substitute for responsible and proper adult
- supervision and should not be used as such 4. This product is not intended for use as a medical
- Do not use this product near water. For example do not use it next to a bath tub, wash bowl kitchen sink. laundry tub or swimming pool, or in a wet basement or showe
- . CAUTION: Use only the batteries indicated in this manual. There may be a risk of explosion if a wrong type of battery is used for the parent unit. Jse only the supplied rechargeable battery or eplacement battery pack (BT198555/BT298555 for the parent unit. Do not dispose of batteries in a fire. They may explode. Dispose of used battery according to the information in The RBRC® seal.
- Use only the adapters included with this product. Incorrect adapter polarity or voltage can seriously damage the product Baby unit power adapter: Output: 5V DC 1A
- Parent unit power adapter: Output: 5V DC 1A. 8. The power adapters are intended to be correctly oriented in a vertical or floor mount position. The
- prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet outlet
- 9. For pluggable equipment, the socket-outlet shall be installed near the equipment and shall be easily accessible
- 10. Unplug this product from the wall outlet before cleaning. Do not use liquid or aerosol cleaners Use a damp cloth for cleaning
- 11. Unplug the power cords before replacing
- 12. Do not cut off the power adapters to replace them with other plugs, as this causes a hazardous situation
- Do not allow anything to rest on the power cords Do not install this product where the cords may be walked on or crimped
- 14. This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply in your home, consult your dealer or local power company
- 15. Do not overload wall outlets or use an extension
- 16. Do not place this product on an unstable table. shelf, stand or other unstable surfaces.

Limitations: Implied warranties, including those of fitness for a particular purpose and merchantability (ar unwritten warranty that the Product is fit for ordinary use) are limited to one year from the date of purchase Some states/provinces do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. In no event shall VTech be liable for any indirect, special, incidenta consequential, or similar damages (including, but not limited to lost profits or revenue, inability to use the Product or other associated equipment, the cos of substitute equipment, and claims by third parties) resulting from the use of this Product. Some states/ provinces do not allow the exclusion or limitation of ncidental or consequential damages, so the above limitation or exclusion may not apply to you.

#### Please retain your original sales receipt as proof of purchase.

Technical specifications				
Frequency control	Crystal controlled PLL synthesizer			
Transmit frequency	Baby unit: 2406 - 2475 MHz Parent unit: 2406 - 2475 MHz			
Channels	24			
LCD	4.3" Color LCD (WQVGA 480x272 pixel)			
Nominal effective range	Maximum power allowed by FCC and IC. Actual operating range may vary according to environmental conditions at the time of use.			
Power	Parent unit: 3.7V Li-polymer battery			
requirements	Baby unit power adapter: Output: 5V DC @ 1A			
	Parent unit power adapter: Output: 5V DC @ 1A			

#### Credits:

The Background Noise sound file was created by Caroline Ford, and is used under the Creative Commons license. The Stream Noise sound file was created by Caroline Ford and is used under the Creative Commons license. The Crickets At Night sound file was created by Mike Koenig,

and is used under the Creative Commons license. The Heart Beat sound file was created by Zarabadeu, and is used under the Creative Commons license.





Specifications are subject to change without notice © 2016 VTech Communications, Inc All rights reserved, 08/16, VM345-X CIB V2 Document order number: 91-010275-010-100